

# Radium

## Technical information

### DRIVER 15W/350mA IP20

Constant current LED driver for LED modules with an operating current of 350mA and an output voltage between 33V and 42V.

For protection class I and protection class II luminaires.

Flicker free with high efficiency and long service life of 70,000h @T<sub>c</sub> 67°C.


For AC operation at 230V 50-60Hz or DC operation at 200-280V DC.



Recommended for the following Radium LED T8 Neo Tube:

- 43719848 LED T8 NEO 18 840/G13
- 43719849 LED T8 NEO 18 865/G13

## Drawing

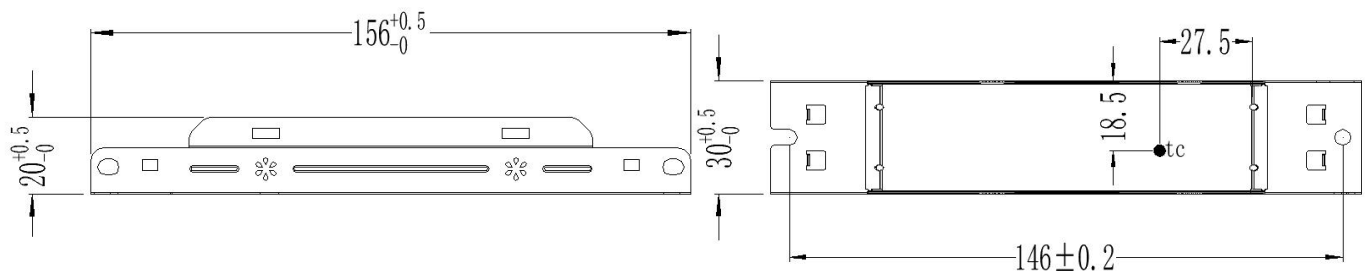

## Technical Data

### General data

Code	DRIVER 15W/350mA IP20
Article No.	OTNA4033
EAN10	4003556010857
EAN40	4003556410855
Weight [g]	90 g
Length [mm]	156 mm
Width [mm]	30 mm
Height [mm]	20 mm
Service Life @T <sub>c</sub> 73°C	50,000 h
Service Life @T <sub>c</sub> 67°C	70,000 h
Service Life @T <sub>c</sub> 62°C	100,000 h
Guarantee	5 years

### Operating Conditions

Permissible ambient temperature T <sub>a</sub> [°C]	-30°C...+50°C
Permissible storage temperature [°C]	-40°C...+80°C
Permissible T <sub>c</sub> temperature [°C]	-20°C...+70°C
Max. permissible T <sub>c</sub> temperature [°C]	+70°C
Permissible air moisture	20-90%RH
Degree of protection (IP)	IP20
Protection class	I

### Electrical Parameter Output

Rated power [W]	11,5 – 14,7 W
Permissible voltage [V DC]	33 – 42 V
Output current [mA]	350 mA
Output current tolerance [mA]	± 5 %
Output P <sub>ST_LM</sub>	≤ 1

Radium Lampenwerk GmbH  
P.O. Box 1440 - 51678 Wipperfurth

☎ +49-2267 - 81 - 1  
FAX +49-2267 - 81 - 231

**Information no. 9904-01-2112**

Validity: The technical information sheets (TI sheets) are updated at irregular intervals! The user is responsible for the validity and up-to-dateness of this TI sheet. With the publication of this TI sheet, all previous editions for this lamp type lose their validity.

# Radium

## Technical information

Output SVM	≤ 0.4
Offset time @AC 230V	<0.5 s
Kind of protection embodied	Short-circuit proof, open-circuit-proof

### Electrical Parameter Input


Mains voltage range [V AC]	220 – 240 V
Alternating voltage range [V AC]	200 – 264 V
Direct voltage range [V DC]	200 – 280 V
Mains frequency [Hz]	50 – 60 Hz
Nominal current [A]	0.14 A Max.
Mains power factor [ $\lambda$ ]	≥0.9 @230 V <sub>ac</sub>
THD	≤20 %
Efficiency	≥87 %
Inrush current	≤20A & 200μs @ 230 V <sub>ac</sub> Max.
Power consumption in Stand-by	≤0.5 W
Surge voltage strength L-N	1 kV
Surge voltage strength L/N-PG	2 kV

### Safety and electromagnetic compatibility


Certificates	ENEC, CE
Safety standards	EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62384:2016/A1:2009, EN61347-2-13:2014/A1:2017, EN61347-1:2015, EN62493:2015 IEC 61347-1:2015, IEC61347-2-3:2014, IEC61347-2-13:2014/AMD1:2016
EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3
EMS	CE-EMC/RCM: EN61000-4-2,3,4,5 (L-N:1KV L/N-PG:2KV),6,11
RoHS	RoHS 2.0 (EU) 2015/863

## Electrotechnical Parameter


### Mains power factor $\lambda$

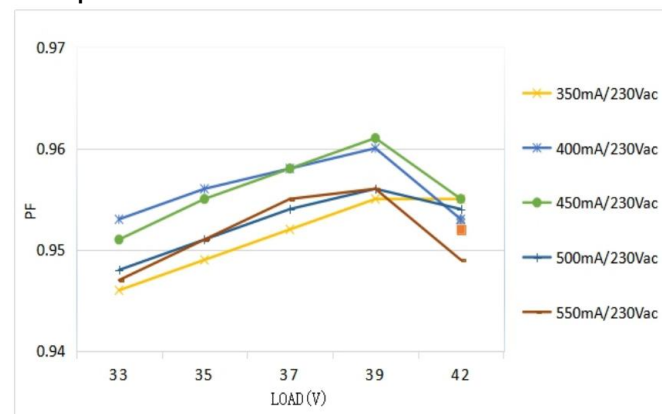

### Efficiency

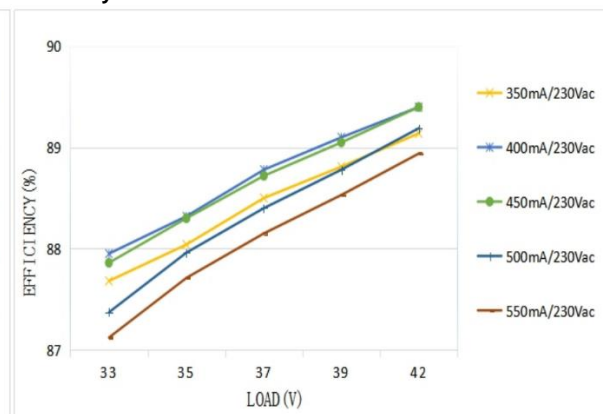

### Fuse rating

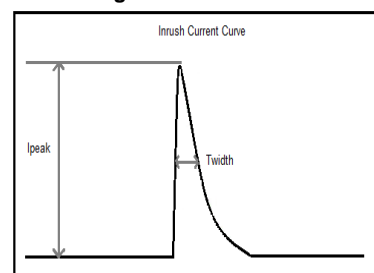

Characteristic	Current	Max. no. of devices
B	10A	22
	16A	35
C	10A	36
	16A	59
$I_{peak} / T_{width}$	≤20A / 200μs	

Radium Lampenwerk GmbH  
P.O. Box 1440 - 51678 Wipperfurth

+49-2267 - 81 - 1  
FAX +49-2267 - 81 - 231


Information no. 9904-01-2112

Validity: The technical information sheets (TI sheets) are updated at irregular intervals! The user is responsible for the validity and up-to-dateness of this TI sheet. With the publication of this TI sheet, all previous editions for this lamp type lose their validity.


# Radium

## Technical information

### Service life

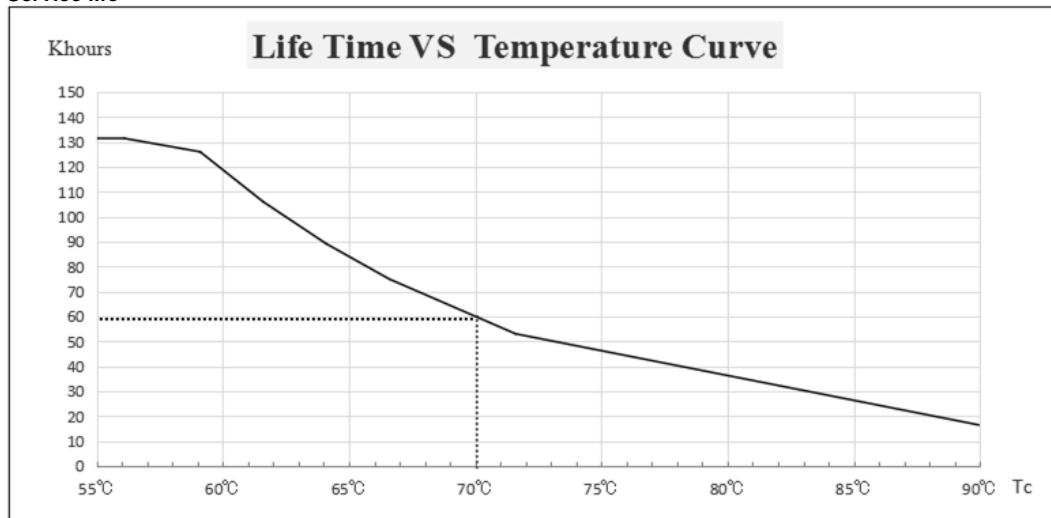

### Wiring diagram

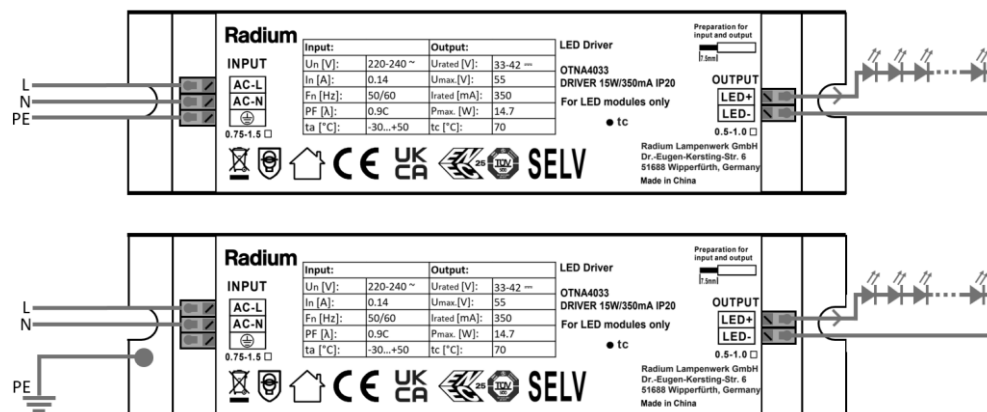

### Notes

- It is recommended to install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity.
- As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant.
- Unless otherwise stated, the parameters of the power factor, harmonics and efficiency were test results under the conditions ambient temperature of 25°C, humidity of 50%, input voltage of 230Vac (50Hz) and full load.
- Use this product according to the specifications. Otherwise there may be malfunction.
- Use of light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Radium Lampenwerk GmbH  
P.O. Box 1440 - 51678 Wipperfurth

+49-2267 - 81 - 1  
FAX +49-2267 - 81 - 231

Information no. 9904-01-2112

Validity: The technical information sheets (TI sheets) are updated at irregular intervals! The user is responsible for the validity and up-to-dateness of this TI sheet. With the publication of this TI sheet, all previous editions for this lamp type lose their validity.